

**ROUTER
CCR**



BY FIBER SYSTEM
PRODUCT MANUAL

CCR1009-7G-1C-1S+

CCR1009 -7G-1C-1S+



Product Overview

The new updated revision of CCR1009 is here. We attempted to combine all the customer feedback and best practice in CCR device manufacturing that we learned over the last three years, since the first CCR1009 devices were launched.

The unit is equipped with dual power supplies built in for redundancy (if one power line fails, the other one will take over automatically).

Unit comes with the 1U rackmount case and supports a Smart card, to store your private key for use in all features that support Certificate based authentication. It also includes LCD touchscreen, microSD and a SFP+ port for 10G connections.

Main Characteristics

- Combo-port - a single 1Gbit software interface that has two hardware interfaces - a SFP cage and a Gigabit Ethernet port, allowing you to use any type of connection available to you. Port also allows to switch from one to another interface from software, or in event of disconnect, providing new, unique hardware fail-over feature.
- More throughput - due to how ports are connected to CPU, new CCR1009 models can achieve higher theoretical throughput.




- No switch-chip - the device now features only fully independent Ethernet ports each with a direct connection to the CPU, allowing to overcome previous shared 1Gbit limitation from switch-chip ports and utilize full potential of CPU processing power on those ports.
- 100Mbps SFP support - this is our first device that supports 100BASE-LX/100BASE-SX/100BASE-BX fiber modules, as well as standard 1.25G SFP modules.

Technical Specifications

Product code	CCR1009-7G-1C-1S+
CPU nominal frequency	TILE-Gx9, 9 cores, 1.2 GHz
Size of RAM	2 GB
Storage type	NAND
Storage size	128 MB
10/100/1000 Ethernet ports	7
Number of USB ports	1
Power jack	2
PoE in	Yes
Supported input voltage	18 V - 56 V
Voltage monitor	Yes
PCB temperature monitor	Yes
CPU temperature monitor	Yes
LCD	Yes
Dimensions	444x175x47mm
Operating system	RouterOS, level 6 license
Max Power consumption	34W
Ethernet/SFP combo port	1
SFP+ ports	1
USB slot type	microUSB type AB
Smart card	Yes
Storage expansion	microSD
Serial port	RS232
Suggested price	\$495

Packaging & Delivery


Packaging Details: USB Cable, Rack Ears, 2x IEC Cord

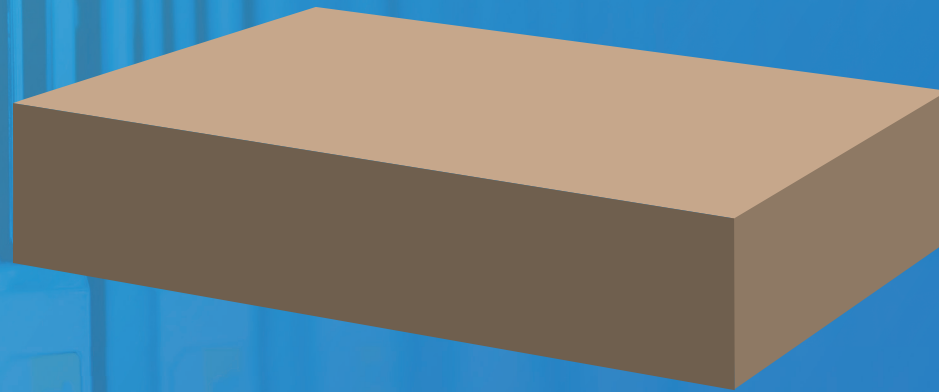


Packing case



CONTACTOS


 @szfibersystemcoltd

 @szfibersystemcoltd


 <http://szfibersystem.com/>

 sale@szfibersystem.com

Matriz (China):
Sala 201, Bloque A, Edificio Digital Garden
City, 1079 Nanhai Avenue, Distrito Nanshan,
Shenzhen, China

 +8618927463845
+8613714906306

Sucursal Ecuador:
Urbanización 6 de Diciembre, Pasaje San
Blas OE6-49 y Princesa Toa, Quito, Ecuador

 +593984510113
+593983373961

Sucursal Perú:
Calle Huaman Poma de Ayala 349 y Av. Los
Patriotas entre la quinta y sexta frente al
parque Virgen de Guadalupe, San Miguel,
Lima Perú.

 Fijo: +5115005857
Móvil : +51973644663