


**CONNECTORS, PATCH
CORDS AND OTHERS**



BY FIBER SYSTEM PRODUCT MANUAL

Pigtails

Pigtail SC/APC

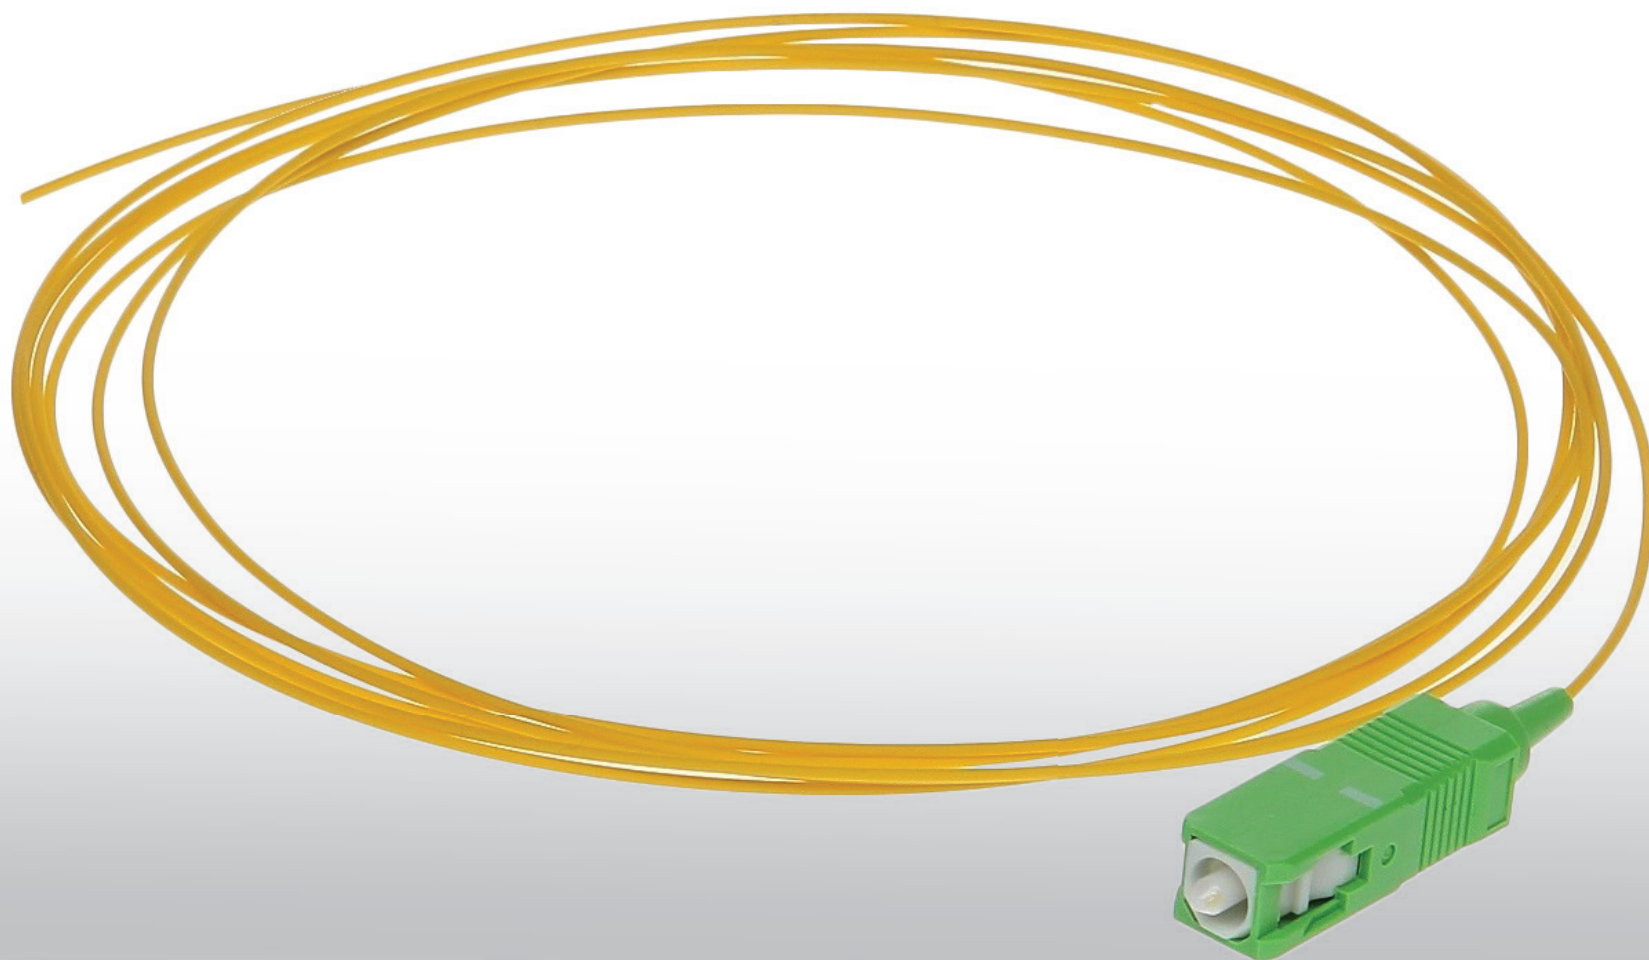

Product Overview

Quick Details

- FOP-3M-SM-SC/APC-S
- Fiber Optic Pigtail


Connector Type: SC/APC

- Length: 3 meters
- Simplex, Single Mode

Features:

- Low insertion loss, RoHS cable
- 2mm jacket for more flexibility and capacity in tight spaces.
- Meet all standard panel interfaces, easy to apply
All cables serialized and test results are recorded
High bandwidth, high tensile strength, small bend radius

Pigtail SC/UPC

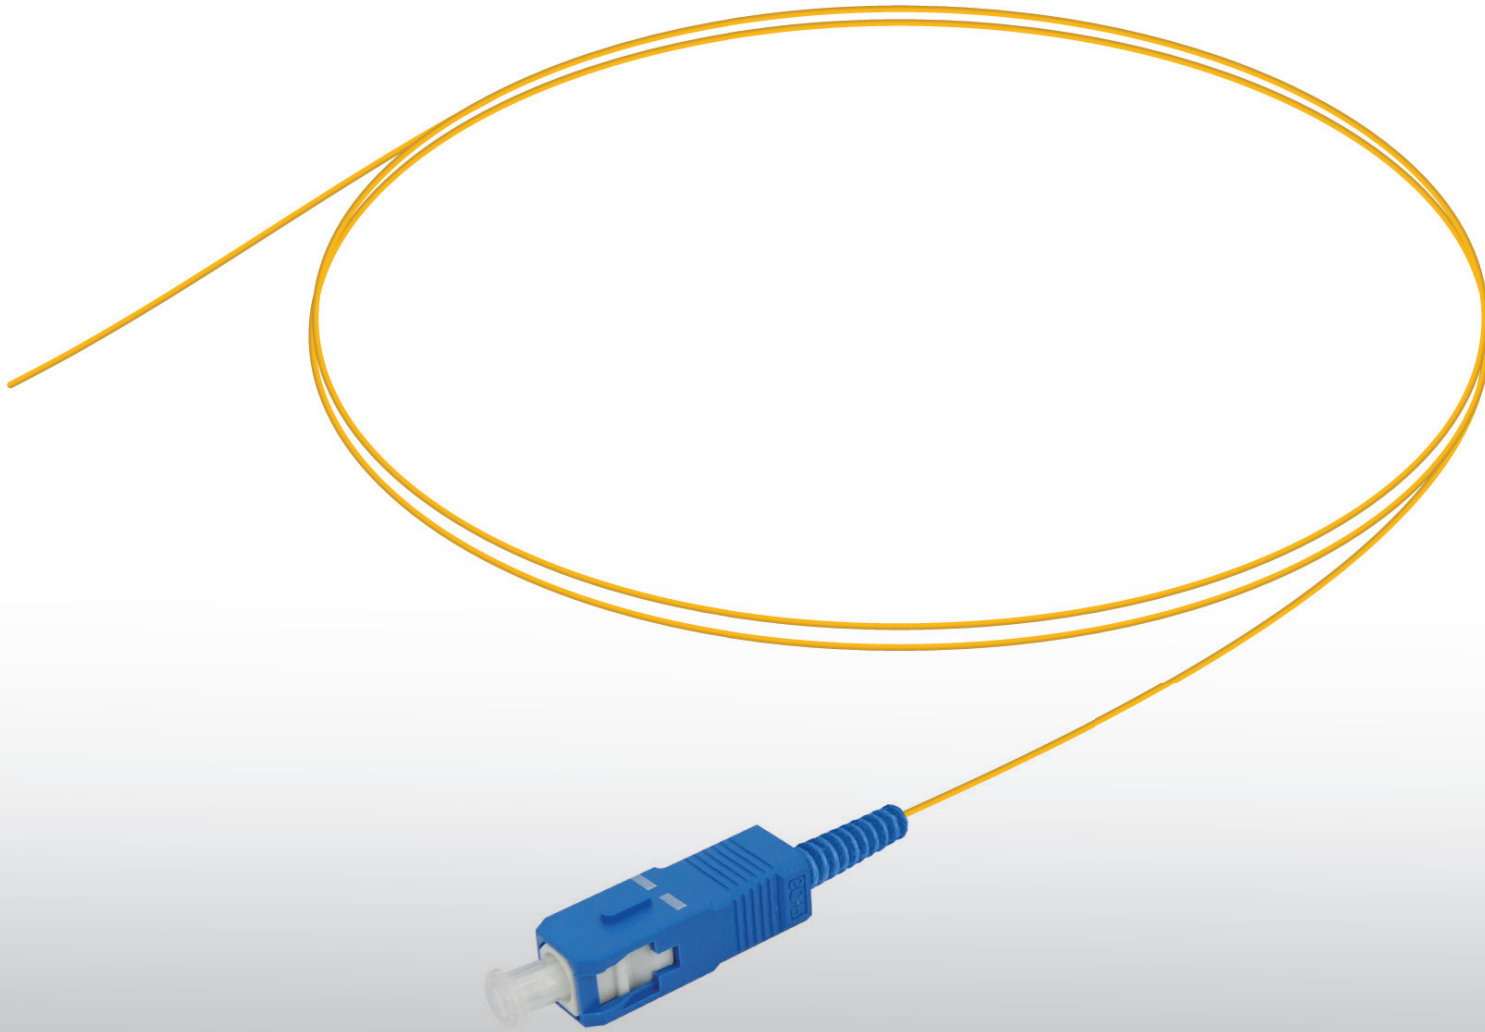

Product Overview

Quick Details

- SC (Square Connector) type connectors has 2.5 mm diameter ferrule structure.
0.9 mm diameter pigtail cables

Connector Type: SC/UPC

- Length: 3 meters
- Simplex, Single Mode

Features:

- Insertion Loss (IEC 61300-3-4-Method-B): ≤ 0.30 dB
- Return Loss (IEC 61300-3-6-Method-B): ≥ 50 dB (UPC), ≥ 60 dB (APC)
- Durability: $< 0,1$ dB typical change for > 500 matings
- Flammability: UL94 V-0
- Operating Temperature: -40°C to $+85^{\circ}\text{C}$
- Connector End Face Geometry: IEC 61755-3



CONTACTOS



@szfibersystemcoltd



@szfibersystemcoltd



<http://szfibersystem.com/>



sale@szfibersystem.com

Matriz (China):
Sala 201, Bloque A, Edificio Digital Garden
City, 1079 Nanhai Avenue, Distrito Nanshan,
Shenzhen, China



+8618927463845
+8613714906306

Sucursal Ecuador:
Urbanización 6 de Diciembre, Pasaje San
Blas OE6-49 y Princesa Toa, Quito, Ecuador



+593984510113
+593983373961

Sucursal Perú:
Calle Huaman Poma de Ayala 349 y Av. Los
Patriotas entre la quinta y sexta frente al
parque Virgen de Guadalupe, San Miguel,
Lima Perú.



Fijo: +5115005857
Móvil: +51973644663